


## Turret Series

**RS/HPF/ESB  
Slimline, HO, VHO, SSB/T8**

MODEL NUMBER	NUMBER of LAMPS	BALLAST TYPE	NOMINAL LENGTH
S240	2-40W	RS, HPF, ESB	4'
S440	4-40W	RS, HPF, ESB	4'
S248	2-38W	Slimline	4'
S448	4-38W	Slimline	4'
S272	2-54W	Slimline, ESB	6'
S472	4-54W	Slimline, ESB	6'
S296	2-75W	Slimline, ESB	8'
S496	4-75W	Slimline, ESB	8'
S248-8	2-60W	H.O. 800 M.A.	4'
S272-8	2-85W	H.O. 800 M.A.	6'
S296-8	2-105W	H.O. 800 M.A.	8'
S248-15	2-110W	1500 MA	4'
S272-15	2-160W	1500 MA	6'
S296-15	2-215W	1500 MA	8'

MODEL NUMBER	NUMBER of LAMPS	BALLAST TYPE	NOMINAL LENGTH
S232	2-32W	SSB/T8	4'
S332	3-32W	SSB/T8	4'
S332T	6-32W	SSB/T8	8'
S432	4-32W	SSB/T8	4'
S259	2-59W	SSB/T8	8'
S286-8	2-86W	SSB/T8	8'

MODEL NO.	DESCRIPTION
B1	Emergency Battery Pack - Rapid Start
B2	Emergency Battery pack - Slimline
W	277V
SS	Single stem and canopy set
SGH	Slide grip hanger



SGH



SS

### SPECIFICATIONS





**HOUSING:** Channel and 4 ft. covers of code gauge die-formed steel construction. All Channels reinforced by ribbing the entire length for extra rigidity. Dual purpose end plate acts as a coupler for continuous row mounting. Socket plates snap into housing without screws.

**FINISH:** All painted metal parts are treated with a rust-inhibitor and baked at 320° F with high-reflective white enamel to provide minimum reflectance of 88%.

**ELECTRICAL:** All units wired with ballasts incorporating Class P thermal protection, for 120 volt, 60 cycle AC. Sockets completely wired.

**INSTALLATION:** May be surface, pendant, slide hanger or chain mounted, individually or in continuous rows.

**LABELS:** U/L combined with I.B.E.W.

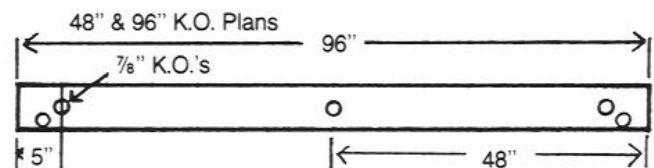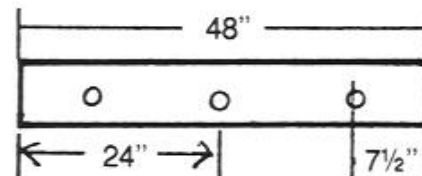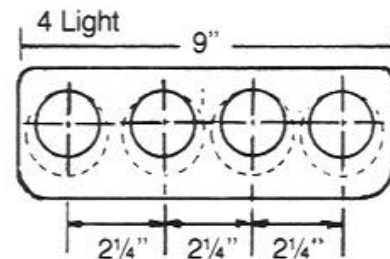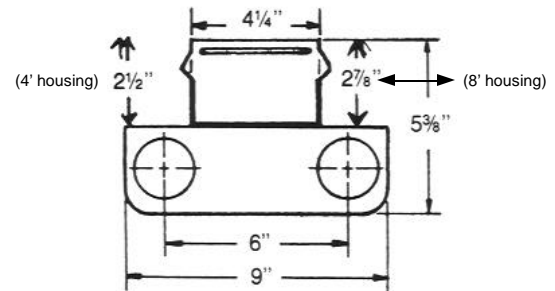

Specifications subject to change without notice.



**Duray Fluorescent Manufacturing Company, Inc.**

2050 West Balmoral Avenue Chicago, Illinois 60625 Phone 773.271.2800 Fax 773.271.4410 www.durayinc.com