

Wall Washer Series

T5, T5HO, T8, T8HO

Specifications

HOUSING: Code gauge sheet metal die formed and welded construction.

REFLECTOR: Die formed aluminum sheet substrate with silver based polyester film laminate.

ELECTRICAL: Electronic ballast incorporating Class "P" thermal protection. 120 volts AC 60 Hz standard (other voltages available). Class "A" sound rating. Ballasts mounted in direct contact with housing for maximum head dissipation. Sockets completely wired. Accepts 1/2" diameter conduit, 7/8" outside diameter.



INSTALLATION: Units may be wall mounted, individually or in continuous rows.

FINISH: Detergent cleaned with iron phosphate and chromic acid rust inhibitor, chip resistant powder urethane polyester coating, electrostatic applied and baked at 375°F. Custom colors available, consult factory.


LABELS: U/L listed and I.B.E.W.

OTHER: Accessories rated for 120 volt use.

*Other options, lamp and ballast configurations available, consult factory.

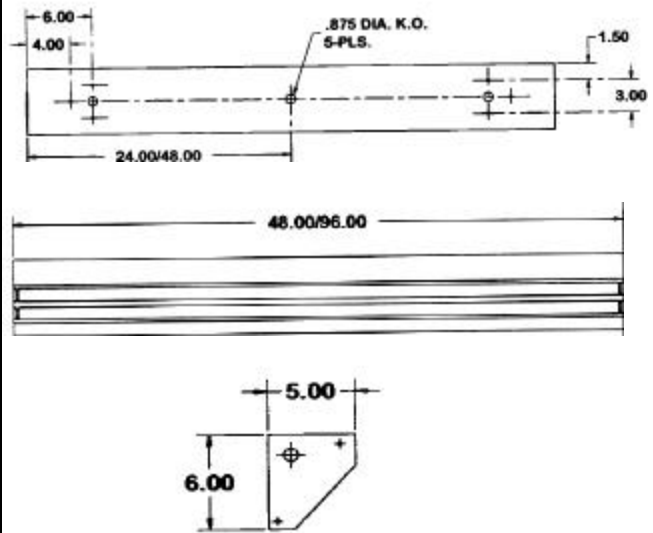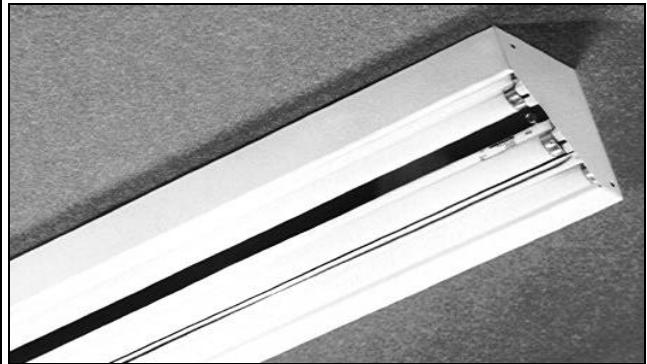

ORDERING INFORMATION: Example WWE432-W

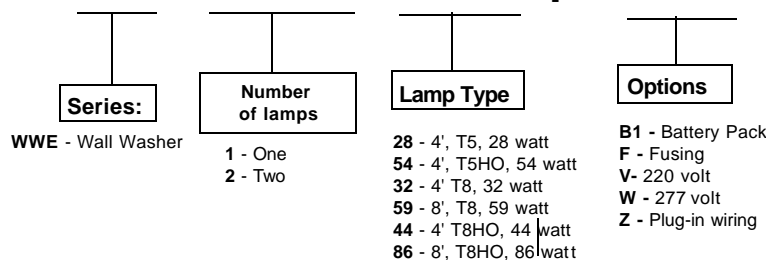

PROPRIETARY NOTE
Except for uses directly granted in writing, information disclosed hereon is confidential and all rights, patent or otherwise, are reserved by Duray Fluorescent Mfg. Co. Specifications subject to change without notice.

