

## Econo-Cloud Series

**RS, HPF  
SSB/T8**

CATALOG NO.	NO. LAMPS	LAMP TYPE	BALLAST TYPE	Dimensions		
				A	B	C
WPC232	2	32W	SSB/T8	11 $\frac{3}{4}$ "	52"	4 $\frac{3}{4}$ "
WPC240	2	40W	RS,HPF	11 $\frac{3}{4}$ "	52"	4 $\frac{3}{4}$ "
WPC432	4	32W	SSB/T8	17"	52"	4 $\frac{3}{4}$ "
WPC440	4	40W	RS,HPF	17"	52"	4 $\frac{3}{4}$ "

**Options:**            **W**—277 volt  
                          **B1**—emergency battery pack

Aluminum housing available on special order.

### SPECIFICATIONS:

**HOUSING:** Body is die-formed of code gauge steel construction and designed for maximum strength and uniformity.


**FINISH:** All metal parts are cleansed by a multi-stage process and treated with an iron phosphate coating to improve paint adhesion and rust resistance, then electrostatically sprayed with white enamel and baked at 320°F. Minimum of 88% reflectivity.

**SHIELDING:** Lenses are formed white acrylic.

**ELECTRICAL:** All units wired with ballasts incorporating Class P thermal protection, for 120 volt, 60 cycle AC. Other voltages available. Ballasts mounted in direct contact with housing for maximum heat dissipation. Sockets completely wired.

**INSTALLATION:** Units may be surface or pendent mounted individually.

**LABELS:** U/L combined with I.B.E.W.

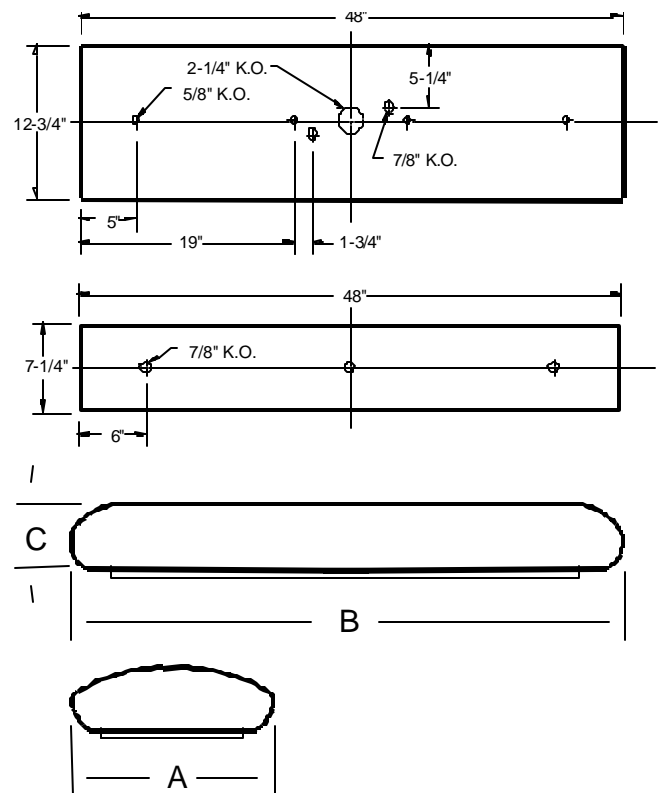

Specifications subject to change without notice.



**Duray Fluorescent Manufacturing Company, Inc.**

2050 West Balmoral Avenue Chicago, Illinois 60625 Phone 773.271.2800 Fax 773.271.4410 www.durayinc.com

11/02