
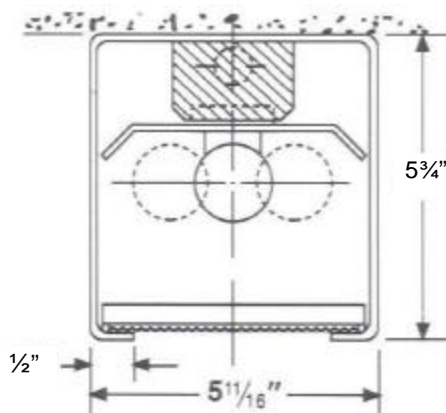


Narrow-Lume Series

**T8/SSB,
RS/HPF, TS/HPF**

Model Number	Number of Lamps	Ballast Type	Nominal Length in Feet
SNH1212	1-20W	TS,HPF	2'
SNH1222	2-20W	TS,HPF	2'
SNH1313	1-30W	RS,HPF	3'
SN1323	2-30W	RS,HPF	3'
SNH1414	1-40W	RS,HPF	4'
SN1424	2-40W	RS,HPF	4'
SN1424T	4-40W	RS,HPF	8'
SSB/T8			
SNH12117	1-17W	SSB/T8	2'
SNH12217	2-17W	SSB/T8	2'
SNH13125	1-25W	SSB/T8	3'
SN13225	2-25W	SSB/T8	3'
SNH14132	1-32W	SSB/T8	4'
SN14232	2-32W	SSB/T8	4'
SN14232T	4-32W	SSB/T8	8'

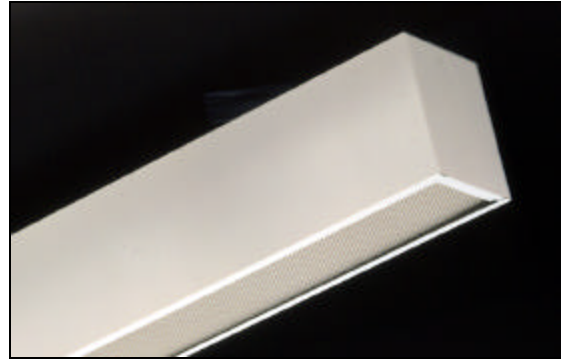

To Order the Following Diffusers	Add to Catalog Number			
	Plastics	Louvers		
		Silver	Gold	White
Prismatic Acrylic #12 Pattern	A			
Prismatic Acrylic #12 Pattern .125	P			
Matte White Acrylic	MWA			
Specular Parabolic Louver 1/2"x1/2"x1/2"		SP1	SPG1	
Specular Parabolic Louver 3/4"x3/4"x1/2"		SP4	SPG4	
Specular Parabolic Louver 1 1/2"x1 1/2"x1"		SP2	SPG2	
Parahex Louver		SPX	SPGX	
White Cubed Acrylic Louver 1/2"x1/2"x3/8"				PLA
Parallel Blade Aluminum Louver 3/4" deep x 2" spacing	PBMA			

Accessories	
SS	Single canopy
ST	Stems—specify length: 6" - 48". Example: catalog number for a 12" stem is ST12.

Available on special order:

- Uplight
- Wall mounting
- Custom colors
- Other lamp and ballast combinations available, consult factory.

Ballast Options

W—277 volt
BX39—39 watt biax ballast
BX40—40 watt biax ballast

Specifications subject to change without notice.

SPECIFICATIONS

HOUSING: Entire construction rigidly die-formed of code gauge steel.

SHIELDING: See ordering information.

FINISH: High gloss white enamel.

ELECTRICAL: All units wired with "A" sound rated ballasts incorporating Class P thermal protection for 120 volt, 60 cycle AC current. Other voltages available. Ballasts mounted in direct contact with housing for maximum heat dissipation. Sockets completely wired and mounted.

INSTALLATION: Units may be surface or pendant mounted, individually or in continuous rows.

LABELS: U/L and I.B.E.W.



Duray Fluorescent Manufacturing Company, Inc.

2050 West Balmoral Avenue Chicago, Illinois 60625 Phone 773.271.2800 Fax 773.271.4410 www.durayinc.com