Surface

Direct / Indirect Series

T8, T5, T5HO

SPECIFICATIONS

HOUSING: Code gauge perforated steel sheet metal die formed and riveted construction.

ELECTRICAL: Electronic ballast incorporating Class "P" thermal protection. 120 volts AC 60 Hz standard. Class "A" sound rating. Ballasts mounted in direct contact with housing for maximum heat dissipation. Socket completely wired.

INSTALLATION: Chain link, aircraft cable or other suitable suspension hardware (by others).

FINISH: Detergent cleaned with iron phosphate and chromic acid rust inhibitor, chip resistant powder urethane polyester

LABELS: U/L and I.B.E.W.

Specifications subject to change without notice.

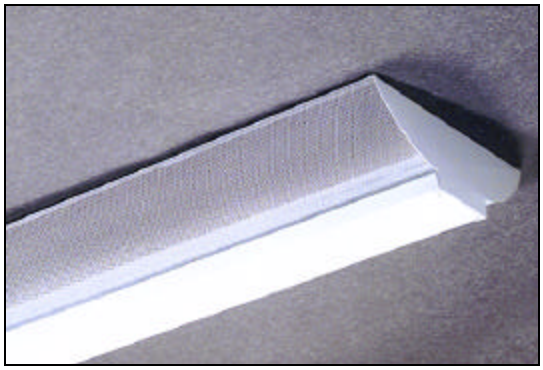

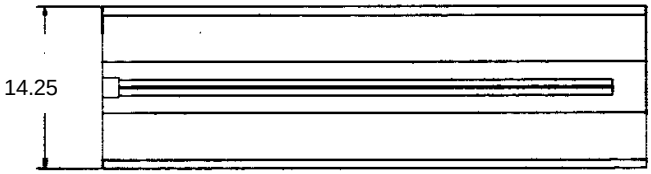

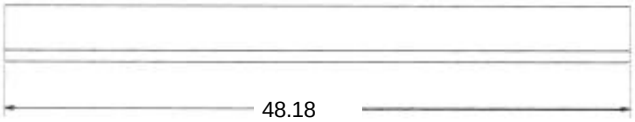

ORDERING INFORMATION: Example DIR232-F

DIR

Series	No. of Lamps	Lamp Type	Options
DIR	**1 - One Lamp** **2 - Two lamps**	**40** - 2', T5TT, 40W **54** - 2', T5TT, 54W **28** - 4', T5, 28W **54** - 4', T5HO, 54W **105** - 4', T5TT, 105W **32** - 4', T8, 32W	B1—Battery Pack F—Fusing V—220 volts W—277 volts Y—Radio Interference filter Z—Plug-in wiring

Duray Fluorescent Manufacturing Company, Inc.
2050 West Balmoral Avenue Chicago, Illinois 60625 Phone 773.271.2800 Fax 773.271.4410 www.durayinc.com

10/03