

NUC Series

T5

Specifications

HOUSING: Code gauge steel sheet metal die formed construction.

SHIELDING: One piece UV stabilized clear translucent polycarbonate diffuser for soft and even - glare illumination. Installs and removed by finger pressure for ease of re-lamping.

ELECTRICAL: Electronic ballast incorporating Class "P" thermal protection. 120 volts AC 60 Hz standard. Class "A" sound rating. Ballasts mounted in direct contact with housing for maximum head dissipation. Sockets completely wired.


INSTALLATION: Key hole slots provided for surface mounting, individually or in continuous rows.

FINISH: Detergent cleaned with iron phosphate and chromic acid rust inhibitor, chip resistant powder urethane polyester coating, electrostatic applied and baked at 375°F. Custom colors available, consult factory.


LABELS: U/L listed and I.B.E.W.

OTHER: Accessories rated for 120 volt use.

*Other options, lamp and ballast configurations available, consult factory.

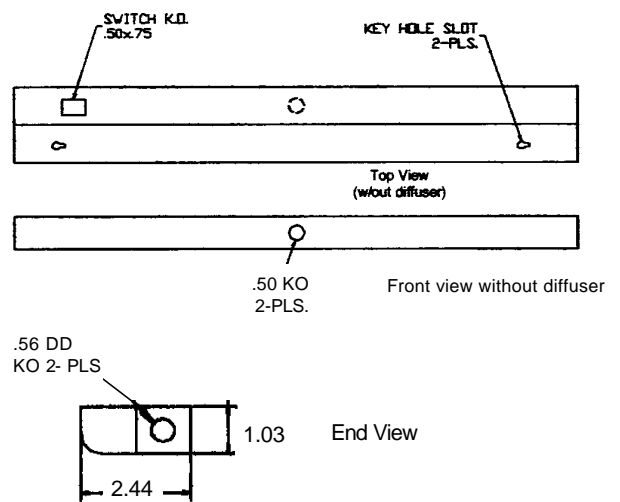

ORDERING INFORMATION: Example NUCW114 - T5-Q

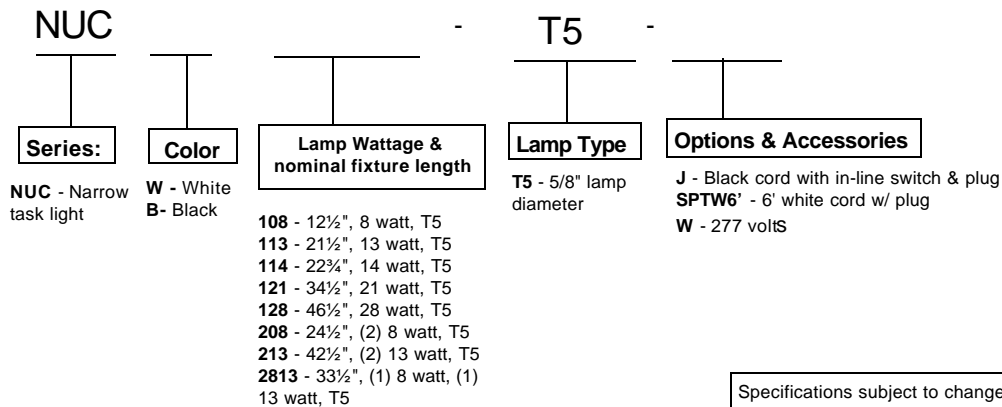

Specifications subject to change without notice.

Accessories rated for 120 volt ballast. Additional options and accessories available. Contact factory for details.



Duray Fluorescent Manufacturing Company, Inc.

2050 West Balmoral Avenue Chicago, Illinois 60625 Phone 773.271.2800 Fax 773.271.4410 www.durayinc.com

10/03