

Strips

Midget Top Mount Series

T5 & T5 High Output

MODEL NO.	No. of Lamps	Ballast Type	Nom. Length
TST114-T5	1-14W	T5/SSB	2'
TST121-T5	1-21W	T5/SSB	3'
TST128-T5	1-28W	T5/SSB	4'
TST135-T5	1-35W	T5/SSB	5'
TST214-T5	2-14W	T5/SSB	2'
TST221-T5	2-21W	T5/SSB	3'
TST228-T5	2-28W	T5/SSB	4'
TST235-T5	2-35W	T5/SSB	5'

MODEL NO.	No. of Lamps	Ballast Type	Nom. Length
TST124-T5HO	1-24W	T5HO/SSB	2'
TST139-T5HO	1-39W	T5HO/SSB	3'
TST154-T5HO	1-54W	T5HO/SSB	4'
TST224-T5HO	2-24W	T5HO/SSB	2'
TST239-T5HO	2-39W	T5HO/SSB	3'
TST254-T5HO	2-54W	T5HO/SSB	4'

Options & Accessories

Code	Description	Code	Description
K	Convenience Outlet	T	50 Hz
V	220 volts	W	277 volts
R	Pull chain	Y	Radio Interference filter

Specifications

Housing Code gauge steel sheet metal die formed and snap-fit construction.





Electrical Electronic ballast incorporating Class "P" thermal protection. 120 volts AC 60 Hz standard. Class "A" sound rating. Ballasts mounted in direct contact with housing for maximum heat dissipation. Sockets completely wired.

Installation Units may be ceiling or wall mounted, individually or in continuous rows.

Finish Detergent cleaned with iron phosphate and chromic acid rust inhibitor, chip resistant powder urethane polyester coating, electrostatic applied and baked at 375 degrees F.


Labels U/L listed and I.B.E.W.

Other Accessories rated for 120 volt use.

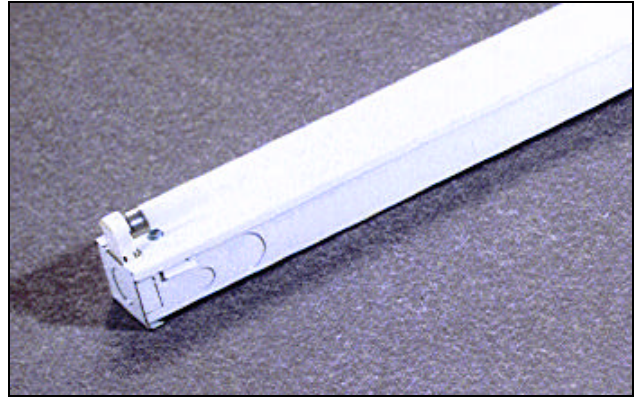


Optional Reflectors

DRLT5



TSTS



TSTA

Specifications subject to change without notice.



Duray Fluorescent Manufacturing Company, Inc.

2050 West Balmoral Avenue Chicago, Illinois 60625 Phone 773.271.2800 Fax 773.271.4410 www.durayinc.com

10/03