


Duraleer Parallel Series

T8 Electronic

MODEL NUMBER	LAMPS	BALLAST TYPE	NOMINAL LENGTH IN INCHES
TH1217	2-17W	SSB/T8	24
Q1225	2-25W	SSB/T8	36
Q1232	2-32W	SSB/T8	48
Q1232T	4-32W	SSB/T8	96
TH14417	4-17W	SSB/T8	24
Q14425	4-25W	SSB/T8	36
Q14432	4-32W	SSB/T8	48
Q1260	2-40w	SSB/T8	60

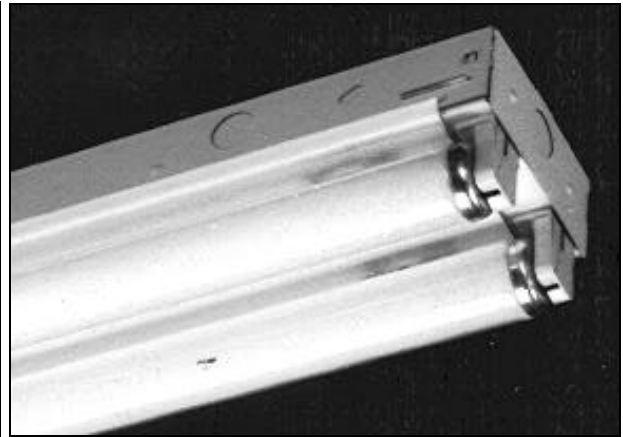




T12 Magnetic

MODEL NUMBER	LAMPS	BALLAST TYPE	NOMINAL LENGTH IN INCHES
B1220	2-20W	Starter, LPF	24
T1215	2-15W	TS,LPF	18
TH1215	2-15W	TS,HPF	18
T1220	2-20W	TS,LPF	24
TH1220	2-20W	TS,HPF	24
Q1230	2-30W	RS,HPF	36
Q1240	2-40W	RS,HPF	48
Q1240CW	2-40W	RS,HPF,CW	48
Q1240T	4-40W	RS,HPF	96
T1420	4-20W	TS,LPF	24
TH1420	4-20W	TS,HPF	24
Q1430	4-30W	RS,HPF	36
Q1440	4-40W	RS,HPF	48



- Note: 1. T indicates tandem. CW indicates for temperature of 0°F.
 2. To order fixtures with aluminum housing, use prefix "AL." Consult factory for availability.
 3. To order fixtures with specular silver film reflectors, use prefix "SR."

Options & Accessories


Code	Description	Code	Description
B1	Emergency Ballast	T	50 Hz
F	Fusing	V	220 volt
K	Grounded convenience outlet	W	277 volt
M	Turn knob switch installed	Z	Plug in wiring
SPTW6'	6' cord/plug white		

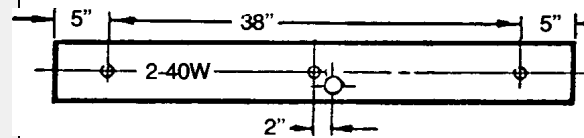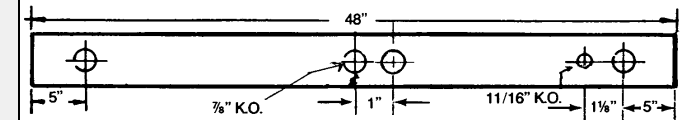


2-20W and 2-15W

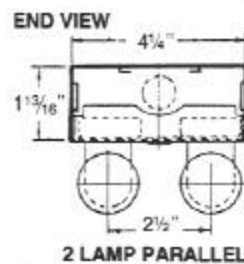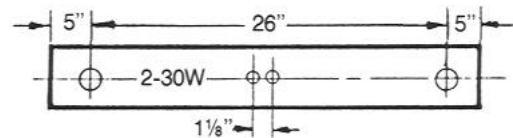

2 LAMP PARALLEL

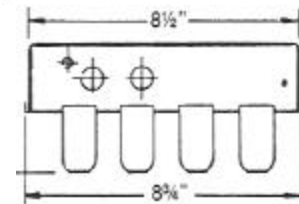

4 LAMP PARALLEL

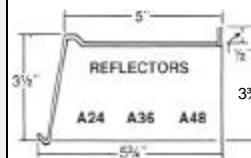

Model No. Asymmetric	No. of Lamps	Nom. Length in Feet
A24	1 or 2	2
A36	1 or 2	3
A48	1 or 2	4

Specifications subject to change without notice.

