




# Big "D" Highlighter

MODEL NUMBER				
Slotted Top	Solid Top	Number of Lamps	Ballast Type	Nominal Length
5120	3120	1-20W	TS, LPF	24-3/8"
5130	3130	1-30W	RS, LPF	36-3/8"
5140	3140	1-40W	RS, LPF	48-3/8"
H5120	H3120	1-20W	TS, HPF	24-3/8"
H5130	H3130	1-30W	RS, HPF	36-3/8"
H5140	H3140	1-40W	RS, HPF	48-3/8"
H5220	H3220	2-20W	TS, HPF	24-3/8"
H5230	H3230	2-30W	RS, HPF	36-3/8"
H5240	H3240	2-40W	RS, HPF	48-3/8"

MODEL NUMBER				
Slotted Top	Solid Top	Number of Lamps	Ballast Type	Nominal Length
H5117	H3117	1-17W	SSB/T8	24-3/8"
H5125	H3125	1-25W	SSB/T8	36-3/8"
H5132	H3132	1-32W	SSB/T8	48-3/8"
H5217	H3217	2-17W	SSB/T8	24-3/8"
H5225	H3225	2-25W	SSB/T8	36-3/8"
H5232	H3232	2-32W	SSB/T8	48-3/8"

	Model Number	Description
<b>New</b>	H3232-M-2B	2 lamps switched individually with 2 circuit turn knob switch offering flexibility of high and low light levels

Accessories	
Model Number	Description
K	convenience outlet
M	turn knob switch
N	rocker switch
WG	walnut grain finish (suffix)

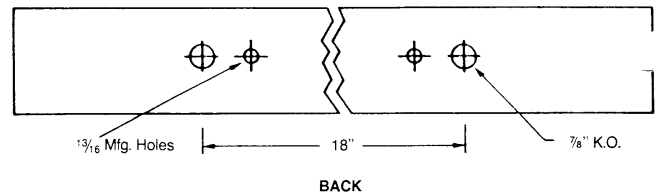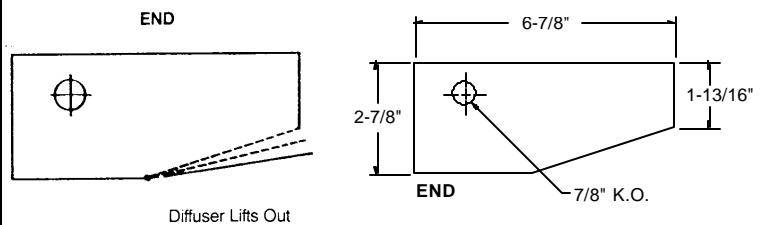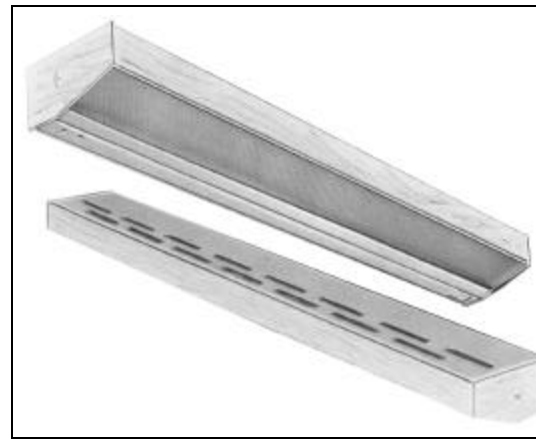

### SPECIFICATIONS

**HOUSING:** Entire construction rigidly die-formed of code gauge steel. Aperture top for soft indirect lighting.

**SHIELDING:** One-piece, .125 light-stabilized, virgin acrylic, prismatic diffuser for soft and even glare-free illumination. Easily installed and removed.

**FINISH:** All metal parts are cleaned by a multi-stage process and treated with an iron phosphate coating after fabrication to improve paint adhesion and rust resistance, then electrostatically sprayed with white enamel and baked at 320°F.

**ELECTRICAL:** All units wired with A sound rated ballasts, incorporating Class P thermal protection, for 120 volt, 60 cycle AC current. Ballast mounted in direct contact with housing for maximum heat dissipation. Sockets completely wired and mounted.

**INSTALLATION:** Units may be surface or wall mounted, individually or in continuous rows.

**LABELS:** U/L listed combined with I.B.E.W.

