

Acrylic Square Series

RS, LPF
RS, HPF

Ordering Information

| MODEL No. | NUMBER OF LAMPS | BALLAST TYPE | DIMENSION A | DIMENSION B | DIMENSION C |
|-----------|-----------------|--------------|-------------|-------------|-------------|
| WPC22 | 1-22W | RS, LPF | 12" | 10-7/8" | 2-5/8" |
| WPC32 | 1-32W | RS, LPF | 14-1/2" | 13-1/16" | 2-3/4" |
| WPC54 | 1-22W & 1-32W | RS, HPF | 14-1/2" | 13-1/16" | 2-3/4" |
| WPC72 | 1-32W & 1-40W | RS, HPF | 19-1/2" | 18-1/4" | 2-7/8" |



SPECIFICATIONS


HOUSING: Is of sturdy construction, finished in high reflectance post painted white enamel for superior durability and lighting performance. Features an ultra shallow backplate with simple latching system for easy servicing, no tools required.

FINISH: All metal parts are cleansed by a multi-stage process and treated with an electrostatically sprayed white enamel baked at 320°F. Minimum of 90% reflectivity.

SHIELDING: Featuring a white translucent, seamless diffuser molded of extruded acrylic material.

ELECTRICAL: All units wired with ballasts incorporating Class P thermal protection, for 120 volt, 60 cycle AC current. Ballasts mounted in direct contact with housing for maximum heat dissipation.

LABELS: U/L and I.B.E.W.

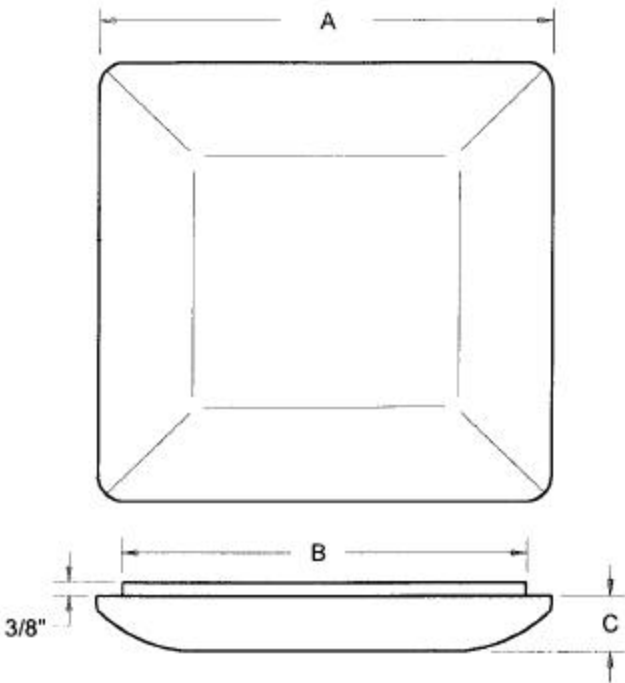

Specifications subject to change without notice.



Duray Fluorescent Manufacturing Company, Inc.

2050 West Balmoral Avenue Chicago, Illinois 60625 Phone 773.271.2800 Fax 773.271.4410 www.durayinc.com