Utility

Fortress Series

T8, T5, T5HO

SPECIFICATIONS

HOUSING: White polyester fiberglass; continuously gasketed channel for a positive watertight seal with diffuser.

DIFFUSER: Clear polycarbonate ribbed pattern or (optional) prismatic diffuser.

LATCHES: Clear polycarbonate.

ELECTRICAL: All units wired with ballasts incorporating Class P thermal protection.

INSTALLATION: Units may be surface or pendant mounted.

LABELS: U/L and I.B.E.W.

Specifications subject to change without notice.

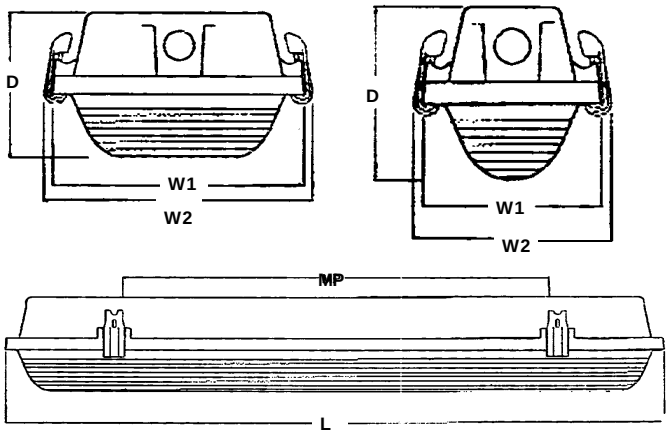

	One Lamp	Two Lamp
D	4.13"	4.13"
W1	4"	6.77"
W2	4.56"	7.33"

	2'	4'
L	27.64"	51.65"
MP (mounting points)	19.69"	43.31"

ORDERING INFORMATION: Example FRT1535T5

FRT

Series	No. of Lamps	Nom. Length	Lamp Wattage	Lamp Type
FRT	**1 - One Lamp** **2 - Two lamps**	**2 - 2'** **4 - 4'**	**14** - 14W, 2', T5 **17** - 17W, 2', T8 **24** - 24W, 2', T5HO **32** - 32W, 4', T8 **28** - 28W, 4', T5 **54** - 54W, 4', T5HO	T8 T5 T5HO

Duray Fluorescent Manufacturing Company, Inc.

2050 West Balmoral Avenue Chicago, Illinois 60625 Phone 773.271.2800 Fax 773.271.4410 www.durayinc.com

10/03