

## Hi-Bay T5

MODEL NUMBER	LAMP TYPE	LENGTH
UHB328	3-28WT5	48"
UHB428	4-28WT5	48"
UHB354	3-54WT5HO	48"
UHB454	4-54WT5HO	48"

**Options (add to end of catalog number):**

- 2B: dual level switching
- WG12: 12 inch wire guard

**SPECIFICATIONS**

**HOUSING:** Die-formed heavy gauge cold rolled steel.

**FINISH:** Reflector is Miro 4™ 95% reflectance anodized aluminum. Housing is pre-painted white.

**BALLAST ACCESS:** Ballasts are accessible by removal of reflector, fastened with eight screws.

**BALLASTS:** Designed for use with Class P electronic ballasts for T5 lamps.

**LAMP HOLDERS:** G5 push-through sockets completely wired.


**MOUNTING:** Fixtures designed for surface, pendant, stem or chain hanging. Can be installed in tandem configurations.

**WIREGUARDS (optional):** Combination 6 and 9 ga. Wire (A.W.G. Standard) with white powder-coat finish. Attaches with clips for easy lamp access.

**LABELS:** U/L and I.B.E.W.



Shown with optional wireguard.

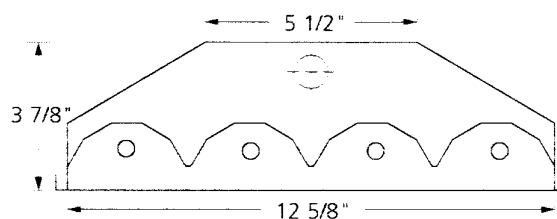

Hi-Bay End View

Specifications subject to change without notice.

9/03



**Duray Fluorescent Manufacturing Company, Inc.**

2050 West Balmoral Avenue Chicago, Illinois 60625 Phone 773.271.2800 Fax 773.271.4410 www.durayinc.com