

Strips

Utility Series

HO, VHO


Ordering Information

MODEL NO.	No. OF LAMPS	TEMP	BALLAST TYPE (T12 Lamp)	NOMINAL LENGTH
S1124-8	1-35W	-20	H.O. 800 MA	2'
S1224-8	2-35W	-20	H.O. 800 MA	2'
S1136-8	1-50W	-20	H.O. 800 MA	3'
S1236-8	2-50W	-20	H.O. 800 MA	3'
S1148-8	1-60W	-20	H.O. 800 MA	4'
S1248-8	2-60W	-20	H.O. 800 MA	4'
S1448-8	4-60W	-20	H.O. 800 MA	4'
S1172-8	1-85W	-20	H.O. 800 MA	6'
S1172-8T	2-85W	-20	H.O. 800 MA	12'
S1272-8	2-85W	-20	H.O. 800 MA	6'
S1472-8	4-85W	-20	H.O. 800 MA	6'
S1196-8	1-110W	-20	H.O. 800 MA	8'
S1196-8T	2-110W	-20	H.O. 800 MA	16'
S1296-8	2-110W	-20	H.O. 800 MA	8'
S1496-8	4-110W	-20	H.O. 800 MA	8'
S1148-15	1-110W	-20	VHO or SHO Lamps 1500 MA	4'
S1172-15	1-160W	-20		6'
S1172-15T	2-160W	-20		12'
S1196-15	1-215W	-20		8'
S1196-15T	2-215W	-20		16'


*T denotes tandem.

Options : **W**- 277 volt, **S**- electronic ballast, **ESB**- energy saving ballast

Accessories



SS - Single Canopy
ST - Stem (5/8" outside diameter painted white - available in 6" - 48" lengths.)



SGH - Slide grip hanger complete with stove bolt and fastener.

Specifications




HOUSING: Channel and cover is of code gauge die formed steel. Deeper size channels, as used for 800 MA and 1500 MA fixtures, are reinforced with ribs, running the entire length. Dual purpose plates act as coupler for continuous row mounting. Socket plates snap into housing without screws.

FINISH: All painted metal parts are treated with a rust-inhibitor and baked at 375°F in a hi-reflective white enamel to provide minimum reflectance factor of 88%.

ELECTRICAL: All units wired with ballasts incorporating Class P thermal protection, for 120 volt, 60 cycle AC. Other voltages available.

INSTALLATION: May be surface, pendant, slide hanger or chain mounted, individually or in continuous rows.

LABELS: U/L combined with I.B.E.W.

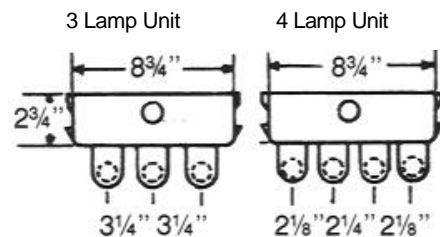

Specifications subject to change without notice.



Duray Fluorescent Manufacturing Company, Inc.

2050 West Balmoral Avenue Chicago, Illinois 60625 Phone 773.271.2800 Fax 773.271.4410 www.durayinc.com