

Industrial

1800 Series - T8

T8/Electronic

MODEL # WHITE ENAMEL REFLECTOR Solid	MODEL # WHITE ENAMEL REFLECTOR Uplight	TEMP	NUMBER OF LAMPS	BALLAST TYPE	NOMINAL LENGTH
A18259	U18259	*0°	2-59W	Slimline	8'
A18459	U18459	*0°	4-59W	Slimline	8'
A18244-8	U18244-8	-20°	2-44W	High Output	4'
A18286-8	U18286-8	-20°	2-86W	High Output	8'
A18486-8	U18486-8	-20°	4-86W	High Output	8'

Note: Other lamp and ballast configurations available. Consult factory for details.

SPECIFICATIONS

HOUSING: Channel die formed of code gauge steel, reinforced by ribbing the entire length for extra rigidity. Dual purpose end plates act as a coupler for continuous row mounting. Socket plates snap into place without screws.



REFLECTOR: 48" long, die formed, cross-ribbed and double embossed for added rigidity. 15% uplite slotting is optional. Fastens without tools to channel by two captive turn latches.

FINISH: All metal parts are cleansed by a multi-stage process and treated with an iron phosphate coating to improve paint adhesion and rust resistance, then electrostatically sprayed with white enamel and baked at 375°F. Minimum of 90% reflectivity.

ELECTRICAL: All units wired with ballasts incorporating Class P thermal protection, for 120 volt, 60 cycle AC current. Other voltages available. Ballasts mounted in direct contact with housing for maximum heat dissipation. Turret sockets completely wired.

INSTALLATION: Units may be surface or pendant mounted, individually or in continuous rows.





LABELS: U/L combined with I.B.E.W. label.

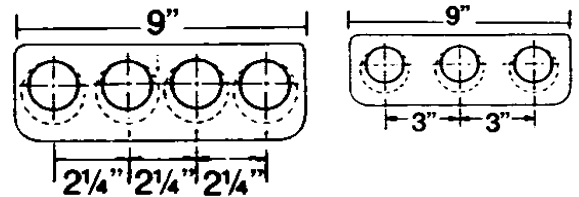

Specifications subject to change without notice.

OPTIONS & ACCESSORIES

Code	Description
B2	Battery Pack
F	Fusing
PDFA	Prismatic Diffuser Frame
PVR	Parabolic Longitudinal Vee Reflector - Provides 30° Lateral Shielding - 4' long
RE	Reflector ends - to be used only with individual units or at end of rows
SGH	Slide Grip Hanger - complete with stove bolt and fastener
TBH	T-bar hanger for slimline/rapid start
W	277 volt
WG13	13" wire guard



Duray Fluorescent Manufacturing Company, Inc.

2050 West Balmoral Avenue Chicago, Illinois 60625 Phone 773.271.2800 Fax 773.271.4410 www.durayinc.com

10/03